

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATIONCorner: South 1/16 Secs 13,14 T. 32N. R. 34W. P.M.M. Lincoln County

1975 Record: No previous record.
(Shaw 2343S) Set a 1-1/2 ins. dia. x 30 ins. USFS brass cap, 24 ins. in the ground.
From which:
Larch, 18 ins. diam., bears N05°W, 14.4ft.
Douglas Fir, 8 ins. diam., bears S80°W, 9.8 ft.

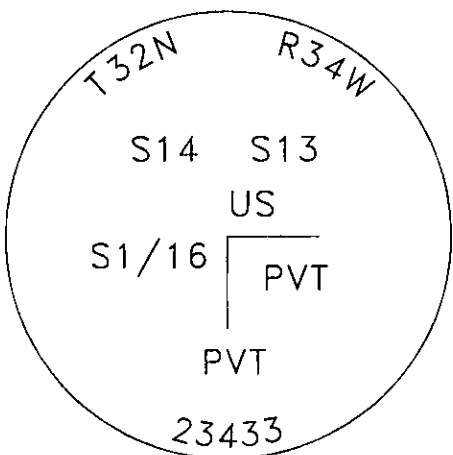
2010 Found: We find a 2-1/2 ins. dia. brass cap, as shown below, on 1-3/4 ins. dia. steel pipe, rising 3 ins. from a mound of stone.
From which:
Douglas Fir, dead fall, bears S75°W, 9.3 ft., w/ no visible markings & BT tag
Larch stump, bears N15°W, 14.1 ft., w/ "2" scribed in wedge cut
NOTE: Record bearings differ from found.

2010 Perpetuation: We establish new reference monument as follows:

Douglas Fir, 12 ins. dia., bears N28°E, 25.5 ft., scribed "S 1/16 S13 BT"
Ponderosa Pine, 7 ins. dia., bears S60°30'W, 20.3 ft., scribed "S1/16 S14 BT"

We set galvanized steel posts, East, 1.5 ft. and South, 1.9 ft. from the monument w/ LSM and USFS boundary decals.

Bearing trees were affixed with BT tags, snow blazed, and a painted red band.

 SKETCH OF CORNER	CERTIFICATION I, <u>Keith Brandt</u> certify the information shown herein is true and correct. <i>Keith Brandt</i> Signature Ground Party Chief I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, M.C.A.) <i>Ken E Jenkins</i> Signature of Surveyor & Seal Date: <u>11/2010</u> Reg. No. <u>9930-LS</u> Employer: <u>Montana Northwest Company</u> <u>PO Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-10</u>
--	---

Office of Clerk and Recorder, County of _____ This "corner
record" was filed for record of 231868 BOOK: CCR CC&R'S PAGE: 11811 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
was noted on the cross-index RECORDED: 03/31/2011 9:46 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
book No. _____ FEE: \$0.00 BY: *Glennie Denise Deputy*
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 14

