

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Northeast Sec. Cor. Sec. 36 T. 33N R. 27W P.M.M. Lincoln County

ORIGINAL G.L.O. NOTES: "Intersect the E. bdy. of the Tp. 3 lks. S. of the cor of secs. 25,30,31 and 36. The bearing trees at the cor. of secs. 25,30,31 and 36 have been affected by forest fires. The corner stone which is a shale stone, 5x12x4 ins. above ground firmly set and marked as described by the Surveyor General, is in a good state of preservation. I therefore destroy the old bearing trees and mark new bearing trees, described as follows; A tamarack 6,ins. in dia., bears N.39°E., 312 lks. dist., marked T33N., R26W., S 30 BT. A pine, 8' ins. dia., bears S.49°E., 228 lks. dist., marked T33N R26W S31 BT. A pine, 6 ins. dia., bears S52°30'W., 166 lks. dist., marked T33N R27W S 36 BT. A pine 4 ins. dia., bears N.61°W., 226 lks. dist., marked T33N R27W S25 BT."

B.L.M. RECORD:

Found stone as described by the GLO, from which the remaining original bearing trees; A larch, 12 ins. diam., bears N.39°E., 312 lks. dist., mkd. S with remaining scribing overgrown. (Record: N.72½°E., 63 lks. dist.) A pine, 10 ins. diam., bears S.49°E., 228 lks. dist., mkd. 3 R26 S31 BT. (Record: S.50°E., 51 lks. dist.) A pine, 10 ins. diam., bears S.60 3/4°W., 232 lks. dist., with overgrown blaze. (Record: S.62½°W., 44 lks. dist.)

At the corner point set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, in concrete, with brass cap mkd.

T33N

R27W R26W

S25 S30

S36 S31


from which:

1960

A larch, 6 ins. diam., bears N. 31½°E., 105 lks. dist., mkd. T33N R26W S30 BT. An aspen, 6 ins. diam., bears S.74½°W., 185 lks. dist., mkd. T33N R27W S36 BT.

FOUND:

BLM Brass Cap marked as described, from which
12" Larch with overgrown blaze, bears N31½°E., 68.4 ft.
17" Pine with scribing visible, bears S52°E., 153.0 ft.
10" Aspen surface scribed, bears S74½°W, 121.8 ft.
9" Pine scribed "S25 BT", bears N21°W, 79.5 ft.

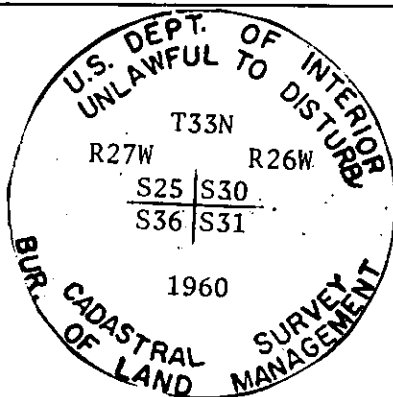

SKETCH OF CORNER

CERTIFICATION

I, EDWARD FOY

certify the information shown herein is true and correct.

Signature Ground Party ChiefI, JAMES H. BURTON

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)


Signature of Surveyor & SealDate: 2/82 Reg. No. 54285Employer: Flathead Land Consultants

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the March 2nd day of 1982 was noted on the cross-index plat and is assigned page No. 1592, in book No. 1

County Official *deputy*

Cross Index No. V-25 T. 33 R. 27 P.M.M.

Sec.36



• corner this sheet

INSTRUCTIONS TO SURVEYORS FOR COMPLETION OF CERTIFIED CORNER RECORDATION FORMS

I. ORIGINAL AND/OR SUBSEQUENT RECORD:

This item should describe or quote those portions of the original or subsequent record which were used in evaluating the corner position. The original record will usually be the General Land Office field notes. Subsequent record can come from several sources: Previously filed corner records, maps and plats, private and public records, etc. Some of the subsequent record, even though not in the public record, but known to have validity by the surveyor, may be quoted and appropriately noted.

The record data helps support the reestablished corner position because it clearly shows what history the surveyor based his corner position on. In some cases, however, the record may be unknown or not pertinent. A statement to that effect should appear on the corner record.

II. DESCRIPTION OF EVIDENCE FOUND OR METHOD OF LOCATING CORNER POSITION:

This item will describe the original or subsequent record evidence found. If portions of the found evidence cannot be reconciled with the record, then the disregarded record should be noted, and, if possible, an opinion as to its cause narrated.

If no physical evidence of the original or subsequent monuments and accessories can be found, then the method used to reestablish the lost or obliterated corner (single proportion, fence intersection, parol evidence, terrain calls, centerline of road, etc.) shall be indicated.

III. DESCRIPTION OF MONUMENTS AND ACCESSORIES SET TO PERPETUATE THE CORNER POSITION:

This item should list all details about the corner and its location which will help exclusively identify the corner position; including size and type of monument, how marked if not shown in sketch, and distinguishing topographic calls which help locate the corner. In many cases, instructions on how to find the corner should be included.

References or ties to other corners are optional and may be drawn on the face or back of the corner record form, or references to Certificate of Survey may be made. Separate drawings may be attached to the corner form.

If state plane coordinate values for the corner position are shown, then the control upon which they are based should be indicated.

IV. SKETCH OF CORNER:

This item will usually show how a found or set corner is marked and may also show topography or accessory monuments found or set and their relation to the corner. There is no stipulated format; the sketch could be transcribed field note entries.

V. CERTIFICATION:

The name and signature of the ground party chief is optional.

The Surveyor who performed or directed the field work which is depicted on the "Certified Corner Record" shall sign and affix his seal in the Certification.

The employer blank is optional but useful in tracking down original field note data or adjacent record if, in the future, questions arise about the corner.

VI.

The Cross Index at the bottom of the page should be completed by the Surveyor. Only the single Township Index where the corner is filed shall be completed.

The lower righthand corner is a corner location diagram and should have the pertinent section filled in at the top and a closed circle indicating the appropriate corner position in the section filled in. This is intended to be an aid in searching the "Record" once it has been filed.

