

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 7 of HES 573 T. 35 N. R. 27 W. P.M.M. Lincoln County

- I. 1919 HES 573 record by W. P. Stephenson: "To closing point on line bet. Secs. 20 and 21, which I establish for Cor. No. 7 and closing corner of this survey as follows:
Set a small stone marked with a cross(x), under a limestone rock, 26x16x14 ins., 16 ins. in the ground, mkd. 7 HES 573 on the SE face, CC on the SW face, and a cross(x) on top for the exact corner point, from which

A cross(X) on a pine, 6 ins. diam., bears S8°49'W, 23 lks.(15.18 ft.) dist.
A cross(X) on a pine, 5 ins. diam., bears N62°15'W, 9 lks.(5.94 ft.) dist.
Each blaze and scribed 7 HES 573 BT.

Raise a mound of earth 4 ft. base, 2 ft. high, on line 6-7, 3 1/4 ft. dist."


- II. Found a firmly set 26x16x14 ins. stone, 8 ins. above the ground, mkd. 7 HES 573 on SE face and CC on SW face.

From which:

A larch, 10 ins. diam., bears S14°W, 14.0 ft. dist., mkd. RM.(No record)
A fir, 11 ins. diam., bears S74°W, 12.4 ft. dist., mkd. RM.(No record)

No evidence of original Bearing Trees were found.

- III. Painted red bands around the bearing trees and attached "Land Survey Monument" and "Bearing Tree" signs.
Set a galvanized steel guard post with "Land Survey Monument" and "Property Boundary" decals, N45°E, 3 ft.
Magnetic declination: 20° East

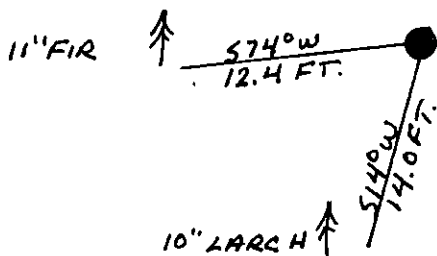

SKETCH OF CORNER

CERTIFICATION
Kenneth Kern

I, _____
certify the information shown herein is true and correct.

Kenneth R. Kern
Signature Ground Party Chief
Alvah P. Hughes


I, _____
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah P. Hughes
Signature of Surveyor & Seal
1/12/92 7322LS

Date: _____ Reg. No. _____
U.S. FOREST SERVICE

Employer: _____

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 28, 1992 was noted on the cross-index plat and is assigned page No. 4681, in book No. _____
Coral M. Cummings by Bill Bruchhoff
County Official
7 HES 573 35 N 27 W

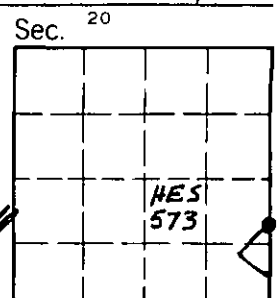

Cross Index No. _____ T. _____ R. _____ P.M.M.

• - corner this sheet