CERTIFIED CORNER RECORDATION

Corner ____ 3 HES 450 T 35 N. R. 32 W. P.M.M. LINCOLN County

I. Record: 1915 U.S. Forest Service record of H.E.S. 450 by Fred E. Thieme: Set for Cor. No. 3, a small stone marked with a cross (x) under a granite stone, 24x16x12 ins., 14 ins. in the ground, marked 3 HES on NE face. Raise a mound of earth 4 ft. base, 2 ft. high NE of cor. No bearings available and pits impracticable.

1982 Certificate of Survey No. 1018, by J. H. Ninnenman, Reg. No. 4661S: Set a 5/8 in diam. by 24 in. long capped steel pin marked J.H.N. 4661S.


II. Found a 5/8 in. diam. by 24 in. long rebar with plastic cap marked J.H.N 4661S, bent and pushed out of position, from which:

A larch, 10 ins. diam., bears S22°E, 49.2 ft. dist., with visible scribe marks.

III. Set by survey a 5/8 in. diam. by 24 ins. long rebar, 8 ins. below the surface of the road, with a 3/4 in. diam. aluminum cap marked as shown below, from which the 2 new bearing trees:

A larch, 12 ins. diam., bears S46°E, 46.1 ft. dist., marked 3 HES 450 BT. A larch, 14 ins. diam., bears S17°W, 48.8 ft. dist., marked 3 HES 450 BT.

Attached Bearing Tree and Land Survey Monument signs to the bearing trees. Painted red the scribed face and a red band around the bearing tree.

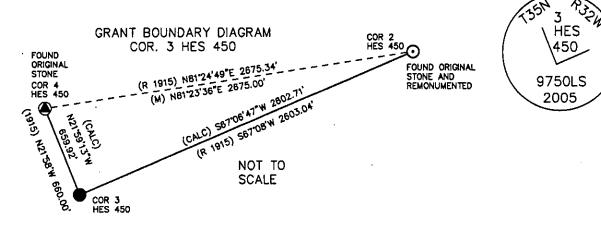



Date of Fieldwork: 6/7/2005

Survey crew: Steve Boyer, Tom Hommel Magnetic declination: 20 East assumed

Equipment used: Hand compass and loggers tape

U.S. Forest Service, Supervisiors Office, 1101 Hwy. 2 West, Libby, MT 59923 (406) 293-6211

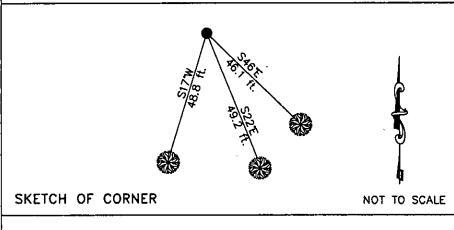



207864 BOOK: CCR CCGR'S

PAGE: 11163 Pages: 1

STATE OF MONTANA LINCOLN COUNTY

RECORDED: 12/05/2007 11:25 KOI: CCGR'S

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00 TO: FILED , Leanni Lugus)

Cross Index No. 3 H.E.S. 450T. 35N. R. 32W. P.M., MT

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

• corner this sheet

Q YER

H.E.S. 450

H.E.S. 274