CERNFIED CORNER RECORDATION

Corner No. 8 HES 408 T. 35 N., R. 32 W., P.M.M. Lincoln County

Record:

1915 HES 408 by F.B. Thieme

"Set a small stone, marked with a cross (x) under a shale stone 30x13x5 ins., 20 ins. in the ground, marked 8 HES 408 on NE face, and a cross (x) on top for the exact corner point, from which:

A cross (x) on a Larch tree, 28 ins. dia., bears S 68°35′ E, 34 lks. dist. A cross (x) on a Larch tree, 15 ins. dia., bears S 52°20′ W, 9 lks. dist., each blazed and scribed 8 HES 408 BT.

Raise a mound of stone, 4 ft. base, 2 ft. high, NE of corner."

Found Evidence:

A shale stone 6x5 ins., 8 ins. exposed above ground, marked 8 HES 408 on the NE face with a cross (x) on top, from which:

A 26 inch dia. Larch snag with visible scribing bears S 68°35′ E, 22.44 ft. dist. A 18 ½ inch dia. Larch with visible scribing bears S 53° W, 6.20 feet dist. (S 52°20′ W, 5.94 ft. record).

A mound of stone, 3 ft. base, 2 ft. high, bears NE of stone monument.

Perpetuation:

I accept the marked stone for Corner No. 8 HES 408.

We establishd one (1) new Bearing Tree described as follows:


A Spruce, 6 3/4 ins. dia., bears N 58° W, 9.20 ft. dist., scribed "8 HES 408 BT".

Painted scribed faces red and 6 inch wide bands around all Bearing Trees.

Attached Land Survey Monument and Bearing Tree signs to trees.

Set a steel post 1 ft. NW of corner with attached monument and property line stickers.

Magnetic Declination: 19° East

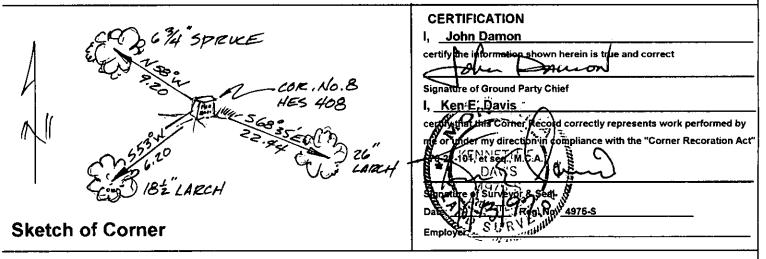

HES No. 408

Cross Index No. 8 HES 408 T. 35 N., R. 32 W., PMM

• THIS CORNER

Section