

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Southeast Sec. Cor. Sec. 29 T. 35N R. 25W P.M.M. Lincoln County

ORIGINAL G.L.O. NOTES: "Set a limestone, 14 X 12 X 8 ins. 10 ins. in the ground, for cor. to secs. 28, 29, 32 and 33, marked with 1 notch on S. and 4 notches on E. edge; from which
A tamarack, 6 ins. diam., bears N.24°30'E. 61 lks. dist., marked T.35N., R.25W., S.28 BT.
A pine, 4 ins. diam., bears S.63°30'E., 41 lks. dist., marked T.35N., R.25W., S.33 B.T.
A pine, 5 ins. diam., bears S.46°15'W., 45 lks. dist., marked T.35N., R.25W., S.32 B.T.
A tamarack, 6 ins. diam., bears N.79°30'W. 43 lks. dist., marked T.35N., R.25W., S.29 B.T.

B.L.M. RECORD:

Found original stone as described by the GLO, At the corner point
Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, in concrete, with brass cap mkd.

T35N R25W

S 29 | S 28
S 32 | S 33

1960

from which

A larch, 10 ins. diam., bears N24½°E., 61 lks. dist., markings overgrown. (Record)

A pine, 10 ins. diam., bears S.63½°E., 41 lks. dist., markings overgrown. (Record)

A stump hole, 7 ins. diam., bears S.46¼°W., 45 lks. dist., with fallen log having old blaze.

The new bearing trees:

A larch, 9 ins. diam., bears N.23°E., 42 lks. dist., mkd. T35N R25W S28 BT.


A larch, 7 ins. diam., bears S.41-3/4°E., 35 lks. dist., mkd. T35N R25W S33 BT.

A larch, 6 ins. diam., bears S.25°W., 107 lks. dist., mkd. T35N R25W S32 BT.

A fir, 9 ins. diam., bears N.54°W., 55 lks. dist., mkd. T35N R25W S29 BT.

FOUND:

B.L.M. Brass Cap monument as described, from which
10" Larch with scar, bears N22°E., 28.0 ft.
12" Larch with scribing, bears N23°E., 39.7 ft.
11" Pine with scribing, bears S64°E., 26.4 ft.
8" Larch with scar, bears S43°E., 23.4 ft.
11" Larch with scar, bears S25°W., 70.4 ft.
Rotted Stump, tree down with blaze, N80°W., 27.8 ft.
15" Fir with scar, bears N54°W., 36.5 ft.

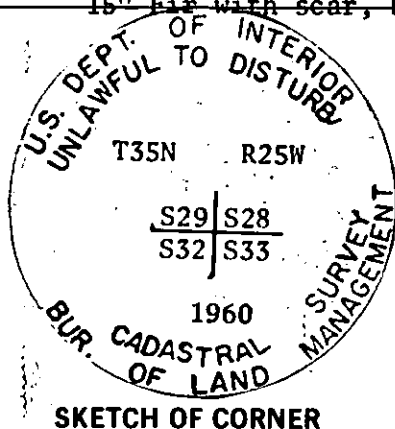

CERTIFICATION

1. EDWARD W. FOY

certify the information shown herein is true and correct.

Edward W. Foy
Signature Ground Party Chief

1. JAMES H. BURTON

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq. M.D.A.)

James H. Burton
Signature of Surveyor & Seal

Date: 4/82 Reg. No. 5428S


Employer: Flathead Land Consultants

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the May 28th day of 1982 was noted on the cross-index plat and is assigned page No. 11662, in book No. _____

Eleanor L. Vaughn by *Betty L. Conces*
County Official Deputy

Cross Index No. Y-9 T. 35N R. 25W P.M.M.

Sec 29



• corner this sheet

INSTRUCTIONS TO SURVEYORS FOR COMPLETION OF CERTIFIED CORNER RECORDATION FORMS

I. ORIGINAL AND/OR SUBSEQUENT RECORD:

This item should describe or quote those portions of the original or subsequent record which were used in evaluating the corner position. The original record will usually be the General Land Office field notes. Subsequent record can come from several sources: Previously filed corner records, maps and plats, private and public records, etc. Some of the subsequent record, even though not in the public record, but known to have validity by the surveyor, may be quoted and appropriately noted.

The record data helps support the reestablished corner position because it clearly shows what history the surveyor based his corner position on. In some cases, however, the record may be unknown or not pertinent. A statement to that effect should appear on the corner record.

II. DESCRIPTION OF EVIDENCE FOUND OR METHOD OF LOCATING CORNER POSITION:

This item will describe the original or subsequent record evidence found. If portions of the found evidence cannot be reconciled with the record, then the disregarded record should be noted, and, if possible, an opinion as to its cause narrated.

If no physical evidence of the original or subsequent monuments and accessories can be found, then the method used to reestablish the lost or obliterated corner (single proportion, fence intersection, parol evidence, terrain calls, centerline of road, etc.) shall be indicated.

III. DESCRIPTION OF MONUMENTS AND ACCESSORIES SET TO PERPETUATE THE CORNER POSITION:

This item should list all details about the corner and its location which will help exclusively identify the corner position; including size and type of monument, how marked if not shown in sketch, and distinguishing topographic calls which help locate the corner. In many cases, instructions on how to find the corner should be included.

References or ties to other corners are optional and may be drawn on the face or back of the corner record form, or references to Certificate of Survey may be made. Separate drawings may be attached to the corner form.

If state plane coordinate values for the corner position are shown, then the control upon which they are based should be indicated.

IV. SKETCH OF CORNER:

This item will usually show how a found or set corner is marked and may also show topography or accessory monuments found or set and their relation to the corner. There is no stipulated format; the sketch could be transcribed field note entries.

V. CERTIFICATION:

The name and signature of the ground party chief is optional.

The Surveyor who performed or directed the field work which is depicted on the "Certified Corner Record" shall sign and affix his seal in the Certification.

The employer blank is optional but useful in tracking down original field note data or adjacent record if, in the future, questions arise about the corner.


VI.

The Cross Index at the bottom of the page should be completed by the Surveyor. Only the single Township Index where the corner is filed shall be completed.

The lower righthand corner is a corner location diagram and should have the pertinent section filled in at the top and a closed circle indicating the appropriate corner position in the section filled in. This is intended to be an aid in searching the "Record" once it has been filed.

FOUND:

B.L.M. Brass Cap Monument, as described, from which
8" Fir, with scar, bears N15°E., 28.6 ft.
Rotted Stump with B.L.M. tag, bears N37°E., 29.6 ft.
15" Fir, with scar, bears S63°E., 37.2 ft.
30" Larch, with scar, bears S49°E., 32.1 ft.
8" Larch, with scar, bears S24°W., 41.7 ft.
Rotted out stump with rotted tree on ground, bears S78°W.,
21.1 ft.
11" Larch, with scar, bears N58°W., 36.5 ft.
Stump Hole, bears N40°W., 41.1 ft.



INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Northwest Section Cor. Sec. 29T. 35N R. 25W P.M.M. Lincoln County

ORIGINAL G.L.O. NOTES: "Set a sandstone 12 X 10 X 4 ins. in the ground, for cor. to secs. 19, 20, 29 and 30, marked with 2 notches on S. and 5 notches on E. edges; from which A fir, 12 ins. in diam., bears N.36°E. 49 lks. dist., marked T35N., R.25W., S.20 B.T.
A tamarack, 28 ins. diam., bears S.47°30'E. 47 lks. dist., marked T.35N., R25W., S.29 B.T.
A fir, 14 ins. diam., bears S.78°30'W. 32 lks. dist. marked T.35N., R.25W., S.30 B.T.
A fir, 12 ins. diam., bears N.40°W., 59 lks. dist., marked T.35N., R25W., S.19 B.T."

B.L.M. RECORD:

Found stone as described by the GLO, at the corner point
Set an iron post, 30 ins. long, 2½ ins. diam. 28 ins. in the ground, in concrete, with brass cap mkd.

T35N	R25W
S 19	S 20
S 30	S 29


1960

From which

A fir stump, 21 ins. diam., bears N36°E., 47 lks. dist., markings rotted away. (Record).
A larch, 30 ins. diam., bears S.47½°E., 47 lks. dist., markings overgrown. (Record).
A stump hole, bears S.78½°W., 32 lks. dist., with fall log mkd. T35N R25W. (Record).
A stump hole, bears N.40°W., 59 lks. dist., mkd. T35N R25W S 19 BT. (Record).
The new bearing trees:
A fir, 6 ins. diam., bears N.14°E., 44 lks. dist., marked T35N R25W S20 BT.
A fir, 10 ins. diam., bears S.63¼°E., 57 lks. dist., marked T35N R25W S29 BT.
A larch, 7 ins. diam., bears S24½°W., 64 lks. dist., mkd. T35N R25W S30 BT.
A larch, 8 ins. diam., bears N59½°W., 56 lks. dist., mkd. T35N R25W S19 BT.

FOUND:

(SEE BACK)

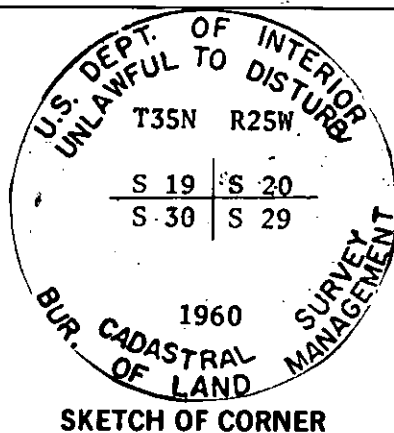

SKETCH OF CORNER

CERTIFICATION

1. EDWARD W. FOY

certify the information shown herein is true and correct.

Edward W. Foy
Signature Ground Party Chief

1. JAMES H. BURTON

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)


James H. Burton
Signature of Surveyor & Seal

Date: 4/82 Reg. No. 5428SEmployer: Flathead Land Consultants


Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the May 28th day of 1982 was noted on the cross-index plat and is assigned page No. 11661, in book No. Eleanor L. Vaughn by Betty L. Conner

County Official deputyCross Index No. R-5 T. 35N R. 25W PMM

Sec. 29



• corner this sheet

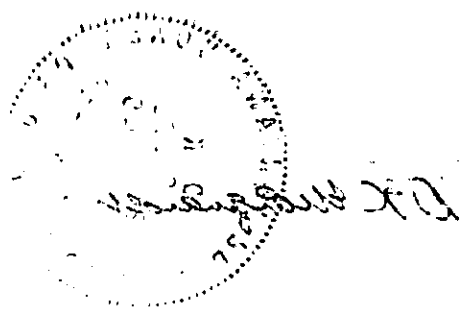

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Section Corner - Sec. 10, 11, 14, 15 T. 35N R. 26W P.M.M. Lincoln County

Record: Set a post 4' long x 4" sq. 24" in ground from which:
 a fir 12" diam bears N. 42° 30' E. 981ks.
 a tamarack 14" diam. bears S. 68° E. 691ks.
 a fir 6" diam. bears S. 48° 15' W. 661ks.
 a tamarack 13" diam bears N. 15° W. 1201ks

Found Shaw pipe - accepted as corner.

CERTIFICATION

I, _____
 certify the information shown herein is true and correct.

Signature Ground Party Chief

I, DK Marguardt

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

DK Marguardt
 Signature of Surveyor & Seal

Date: 7-8-81 Reg. No. 2989ES

Employer: _____


SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the February 17th day of 1981 was noted on the cross-index plat and is assigned page No. 1534, in book No. 1

Eleanor L. Naughton by Betty J. Conner
 County Official deputy

Cross Index No. J-17 T. 35N R. 26W P.M.M.

Sec. 14



• - corner this sheet