

CERTIFIED LAND CORNER RECORDATION  
(REFERENCE FSM 7153.53)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

None

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED  
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner point set a 2" x 30" galvanized iron pipe 24" in the ground and stamped the brass cap:


Date of work: 9/25/70

From Which:

A 12" fir bears S 72° E, 7.0 ft. scribed "RM" with a bearing tree sign attached.

An 8" fir bears N 82° W, 2.3 ft. scribed "RM" with a bearing tree sign attached.

Both trees have a red ring painted around them and the faces are painted red.

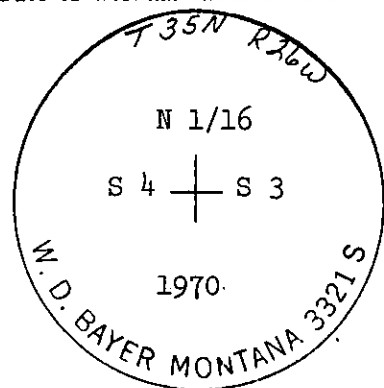

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.  
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

A lath marked 1/16 corner bears N 02° E, 35.3 ft.

A rock pile with a stake in the center and referenced by two trees marked 1/16 bears S 05° E, 50.0 ft.

See explanation on back.

Surveyor's Seal


I, WILLIAM D. BAYER  
certify that the information shown herein is true and correct.

William D. Bayer  
Signature of Ground Party Chief

I, WILLIAM D. BAYER  
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

William D. Bayer  
Signature of Surveyor

DIAGRAM OF CORNER:  
T 35 N R 26 W PMM



◆ = Corner recorded on the sheet


3321 S  
Registration Number

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 20th day of April, 1971, was noted on the cross-index plat and is assigned page No. 231, in book No. 1

Eleanor L. Vaughn By: Mac Watson  
County Official Deputy

Cross Index No. B-13 T. 35 R. 26 Mer.

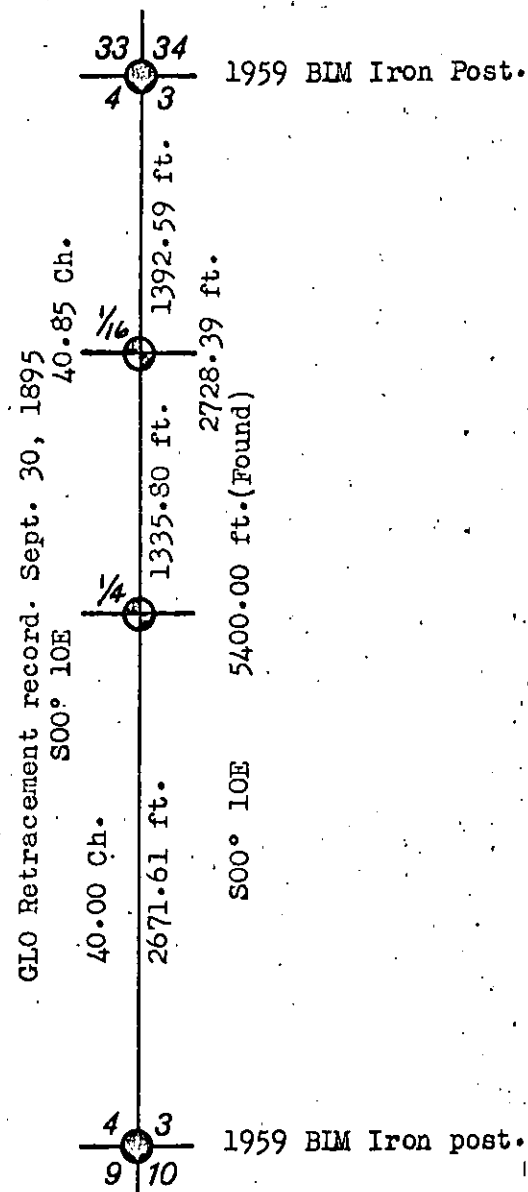

Proportioning for  $\frac{1}{4}$  corner.  $\frac{40}{80.85}$  as  $\frac{X}{5400.00} = 2671.61$  ft. North of  $\frac{4}{9} \frac{3}{10}$

Proportioning for  $\frac{1}{16}$  corner.  $\frac{20}{40.85}$  as  $\frac{X}{2728.39} = 1335.80$  ft. North of  $\frac{1}{4}$  cor.

This survey was double run with a Wild T-2 theodolite, subtense bar, and 200 ft. chain. The survey closed 1 part in 7600.

To the best of my knowledge the two previous surveys on this line did not find any original evidence of the  $\frac{1}{4}$  corner between sections 3 and 4. I concluded by my measurements that one survey was not proportioned and the other proportioned erroneously. I therefore ignored them both.