

- INSTRUCTIONS**
1. Original and/or subsequent record used to evaluate the corner position.
  2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
  3. Description of monument and accessories set to perpetuate the corner position.
  4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography etc., position of accessories, etc.
  5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
  6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner  $\frac{1}{4}$  S27 S26

T. 36N.

R. 26W.


P.M.M. Lincoln

County

RECORD: Original G.L.O. survey 1893.

B.L.M. remon. notes.

At the corner point, as determined from the remains of the orginal bearing trees, set an iron post, 30" long, 2½" diam., 28" in the ground, in concrete, with brass cap mkd.



From Which:

The remains of the orginal bearing trees:

A dead larch, 16" diam., bears S.1W., 31 1ks. dist., visible mks. BT. (Record: S.13E., 31 1ks.)

A stump, 14" diam., bears N.32W., 53 1ks. dist., visible mks. S BT. (Record)

The new bearing trees:

A larch, 12" diam., bears N.22½E., 48 1ks. dist., mkd.  $\frac{1}{4}$  S26 BT.

A larch, 11" diam., bears N.5 3/4W., 58 1ks. dist., mkd.  $\frac{1}{4}$  S27 BT.



Raise a mound of stone, 3' base, 2' high, W. of the iron post.

FOUND: A 3½" B.L.M. brass cap approx.  $\frac{1}{2}$ " above ground, set in mound of stone and mkd as shown.

From Which:

A larch, 13" diam., bears N.2W., 38.3' dist., healed face.

A larch, 14" diam., bears N.24E., 31.6' dist., healed face.

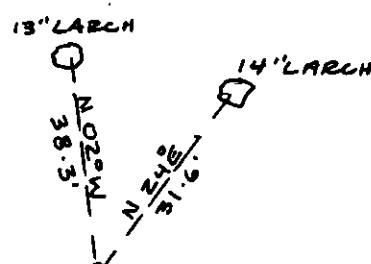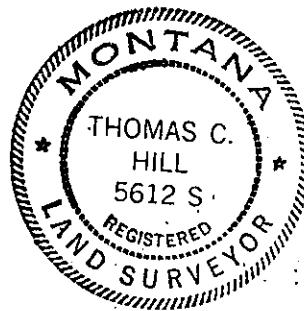


### SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln. This "corner" record" was filed for record on the June 16 day of 1983. was noted on the cross-index plat and is assigned page No. 2251, in book No. \_\_\_\_\_.

Handwritten signature of Betty D. Conces  
County Official Deputy

Cross Index No. T-17 T. 36 R. XL P.M.M.

Sec. 27

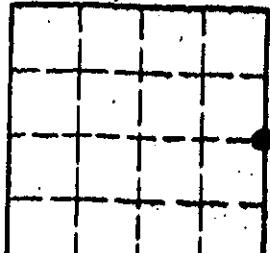

\* - corner this sheet