
CERTIFIED CORNER RECORDATION

Corner SW SEC. Sec. 26 T. 37N R. 31W P.M., MT Lincoln County

I. 1931 original G.L.O. record by Ranney Y. Lyman: Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 26, 27, 34, and 35, with a brass cap mkd:



from which:

A pine, 5 ins. diam., bears N 42 1/2°E, 55 lks. dist., mkd. "T37N R31W S26 BT".

A tamarack, 12 ins. diam., bears S 20 3/4°E, 55 lks. dist., mkd. "T37N R31W S35 BT".

A pine, 5 ins. diam., bears S 37 1/2°W, 31 lks. dist., mkd. "T37N R31W S34 BT".

A tamarack, 15 ins. diam., bears N 28°W, 44 lks. dist., mkd. "T37N R31W S27 BT'.

II. Found an iron pipe, 2 ins. diam, firmly set, with a brass cap, 2 1/2 ins. diam, 10 ins. above the ground, mkd. as shown above.

from which:

A pine, 10 ins. diam., bears N 42°E, 19.0 ft. (29 lks.) dist., with visible scribing. (Rec. 55 lks.)

A larch snag, 11 ins. diam., bears S 17°E, 36.0 ft. (55 lks.) dist., with visible scribing.

(Rec. S 20 3/4°E)

A rotten log, bears S 37°W, 20.5 ft. (31 lks.) dist., with no visible scribing.


A larch, 17 ins. diam., bears N 28°W, 29 ft. (44 lks.) dist., with visible scribing.

III. Established 2 new bearing trees:

A fir, 11 ins. diam., bears S 60°E, 31.9 ft. dist., mkd. "T37N R31W S35 BT". A larch, 9 ins. diam., bears S 1°W, 3.3 ft. dist., mkd. "T37N R31W S34 BT".

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

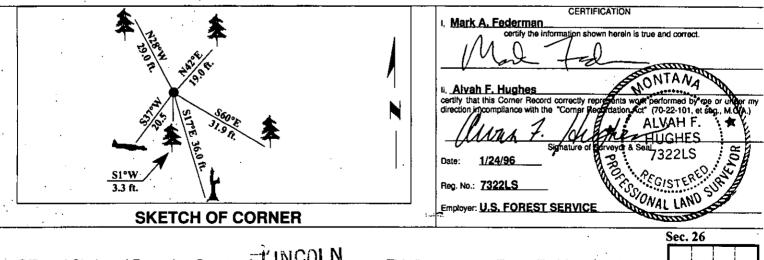

Office of Clerk and Recorder, County of LINCOLN

This "corner record" was filed for record on JULY 25,1997

was noted on the cross-index plat and is assigned page No. 97.00

in book No. CORAL M.CUMMINGS

County Official

• - corner this sheet

ross Index No. V-1

37N R. 31W P.M., MT